e-MINI MY LITE

ELECTRIC SMALL DEICING UNIT





Vestergaard Company has launched the e-Mini MY Lite - our well-known smallest aircraft deicer - in a sustainable version on a fully electric 12 t chassis. The first version is equipped with a 40 kwh lithium-ion battery with enough capacity to drive up to approx. 30 km and up to 15-20 deicing operations on one charge.

The Elephant® e-Mini MY Lite is a simplified, off the shelf version of the traditional Elephant® MY introduced especially for servicing smaller to medium-sized aircraft. Either as a supplement to add flexibility to existing de-icing operations, or as the back-bone de-icer for airport operations, frequented by aircraft types of up to, and including, Boeing 757/767.


The aim of the e-Mini MY Lite is to make quality deicers for servicing smaller to medium-sized aircraft available at lower cost. The e-Mini MY Lite is a 4,000 liter version with two tanks designed for operations using premix type I fluid for deicing and pure type II/IV for anti-icing

MAJOR ADVANTAGES

- Sustainable deicing unit
- Easy to operate
- Easy access for the operator
- Virtually noise free
- Unsurpassed unit lifetime and low maintenance costs
- Off the shelf and less costly

The Vestergaard e-chassis is based on standard industrial, electronic components, which are thoroughly tried and tested. The e-Mini MY Lite can be equipped with either a diesel or electric heater for fluid.

With the e-Mini MY Lite operators can now operate equipment in closed gate areas with zero emission and no small particle pollution. Furthermore, noise is practically eliminated as there is no need for engine idle on the ramp.

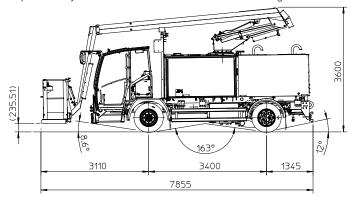

VESTERGAARD

e-MINI MY LITE

TECHNICAL SPECIFICATIONS

> Chassis:

• Vestergaard e-1240

Colour scheme:

- Chassis cabin and tank section: White colour (RAL 9016 equal to Volvo 1107)
- Boom system: Light Grey (RAL 7040)

Tank:

- 3000 liter pre-mix type I, 1000 liter type II/IV
- · Stainless steel tanks with 5 year warranty
- Tank 2 is thermal insulated from tank 1
- Pipes for bottom filling As standard capped with 2" threads

Heating System

- 160 kW diesel total heating capacity Two separate heaters in parallel setup
- Batch heating system, as ensure a guick start-up time.
- Automatic fire extinguish system Novec 1230

Fluid systems

- One circulation pump Type-I compatible max. flow rate 210±10 l/min.
- One pump diaphragm Type-I/II/IV compatible max. flow rate 120±10 l/min
- · Separate tubing of Type I and Type II/V fluid to basket To reduce spillage by change in sprayed fluid type
- Onboard filling function for both tanks

Performance - lift system:

- Maximum lift height 8.6 meter to basket floor
- Fully proportional operation of boom system.
- · Open basket design
- · Working LED-light at basket
- Max. rated load in basket: 205 kg
- Boom construction sandblasted and quality coated corrosion class C4-high

Information display in truck cabin

- Tank level indication
- Temperature in tank 1 and batch tank

Options:

- · Ground gun in left side behind truck cabin. Max hose length 15 meter Only able to spray tank 1 fluid
- Access into tanks via manhole covers and steps/ladder left side
- Spare wheel front/rear
- Basket Side Cover To protect the operator in the basket from the weather
- Amber flashing beacon Located at hydraulic tank
- Optional electric heater
- Coupling for bottom filling Stortz, Camlok, Guillemin, Todo, Elaflex
- Hot at nozzle for pre-mix system To insure instant heated fluid at spray gun in basket
- Reverse camera
- Flow sensor
- Basket sensor
- Side level
- Electrical heating

For questions and requests for further information please contact:

Vestergaard Company A/S

Skullebjerg 31 • Gevninge
DK-4000 Roskilde • Denmark
Tel: +45 4642 2222
sales@vestergaardcompany.com
www.vestergaardcompany.com

Vestergaard Company Inc.

1903 W. Rte. 120 McHenry, IL 60051 • USA Tel: +1 815 759-9102 Toll free: +1 888 759-9118 usa@vestergaardcompany.com

Vestergaard Company SASU

Bâtiment 3450 A, 4, Rue du Té 93290 Tremblay-en-France • France Tel.: +33 1 30 34 55 87 france@vestergaardcompany.com

Vestergaard Company Ltd.Pinthong Industrial Estate

789/50 Moo 1, Nongkham Chonburi 20230 • Thailand Tel: +66 (0) 38 348 630 asia@vestergaardcompany.com





