e-S-ZWS TOWABLE POTABLE WATER SERVICE UNIT

TECHNICAL SPECIFICATIONS

- **Tank section with 800 liter capacity**
  - 800 liter total tank capacity
  - Stainless steel vacuum tank (AISI 316) with 500 mm manhole
- **Cart**
  - Lithium battery, 48V/74 Ah/3.5 kWh
  - On board charger 230V/48V/30AH
  - CEE 16A/230V socket (Blue)
  - 10m charge cable included
  - Short wheelbase for safe and easy maneuvering
  - Parking brake system
  - Standard painting in white RAL 9016
  - Two work lights
  - Fiberglass cover
  - Hour meter for unit operation
- **Fluid system**
  - Electric water pump with low-level protection. Approx 85l/min; approx max. 3,3 bar
  - Operator's panel easy and intuitive to operate
  - Level indicator showing filling volume
  - Resettable LCD displays showing water flow to aircraft water tank
  - No "dead ends" in fluid system, minimalizing risk of bacteria growth
- **Possible additional options**
  - Winterization package
  - Ladder for access to aircraft
  - Return suction on water hose
  - Box for wheel chocks and pair of 3-sided rubber chocks
  - Bracket for fire extinguisher
  - Painting of fiberglass cover
  - Water filter
- **Weight**
  - Empty tank approx. 1110 kg.

Unit with fiberglass cover

Machine room

Operator´s panel

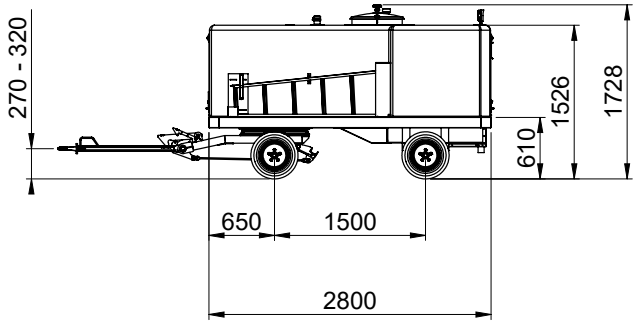

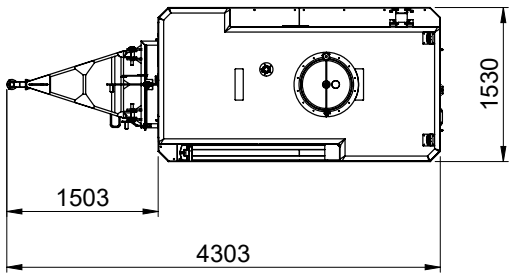

For questions and requests for further information please contact:

Vestergaard Company A/S
Skullebjerg 31 • Gevninge
DK-4000 Roskilde • Denmark
Tel: +45 4642 2222
sales@vestergaardcompany.com
www.vestergaardcompany.com

Vestergaard Company Inc.
1903 W. Rte. 120
McHenry, IL 60051 • USA
Tel: +1 815 759-9102
Toll free: +1 888 759-9118
usa@vestergaardcompany.com

Vestergaard Company SASU
Bâtiment 3450 A, 4, Rue du Té
93290 Tremblay-en-France • France
Tel.: +33 1 30 34 55 87
france@vestergaardcompany.com

Vestergaard Company Ltd.
21/46 Moo 10,
Nongkham, Sriracha,
Chonburi 20230 • Thailand
Tel: +66 33 265769
asia@vestergaardcompany.com

Caution: Specifications and measurements are advisory only and will vary. Please request exact data.

COMPANY VESTERGAARD