ZWS - POTABLE WATER SERVICE UNIT

TECHNICAL SPECIFICATIONS

- Total tank capacity 3700 liter
- Stainless steel (AISI 316) tanks with 5 year warranty
  - 500 mm manhole stainless steel (AISI 316) with snap-lock.
- Special tank designed to avoid bacterial growth
- All components, hoses, connections, etc. in food grade quality.
- Large elevating working platform: Maximum working height of platform floor approx. 4.8 meter
  - Horizontal extension up to 0.5 meter (optional)
  - Platform and complete lift assembly made of stainless steel
  - Able to service potable water systems on all type aircrafts.
- Installed on standard truck chassis: PTO on gearbox
  - Automatic speed-up function when in operation
  - Manual or automatic transmission.
- Simple operation with minimal training needed
- All components easily accessible for service and maintenance
- All components protected against corrosion
- Operators panel at platform accessible from ground and from inside platform respectively.
  - Optional resettable LCD display showing fill volume.
- Work light at rear of unit.
- Maximum flow rate 100 L/min
- Maximum pressure 3.5 Bar
- Standard amber flashing beacon
- Up-light beam for safe positioning
- Anti-collisions sensor on basket

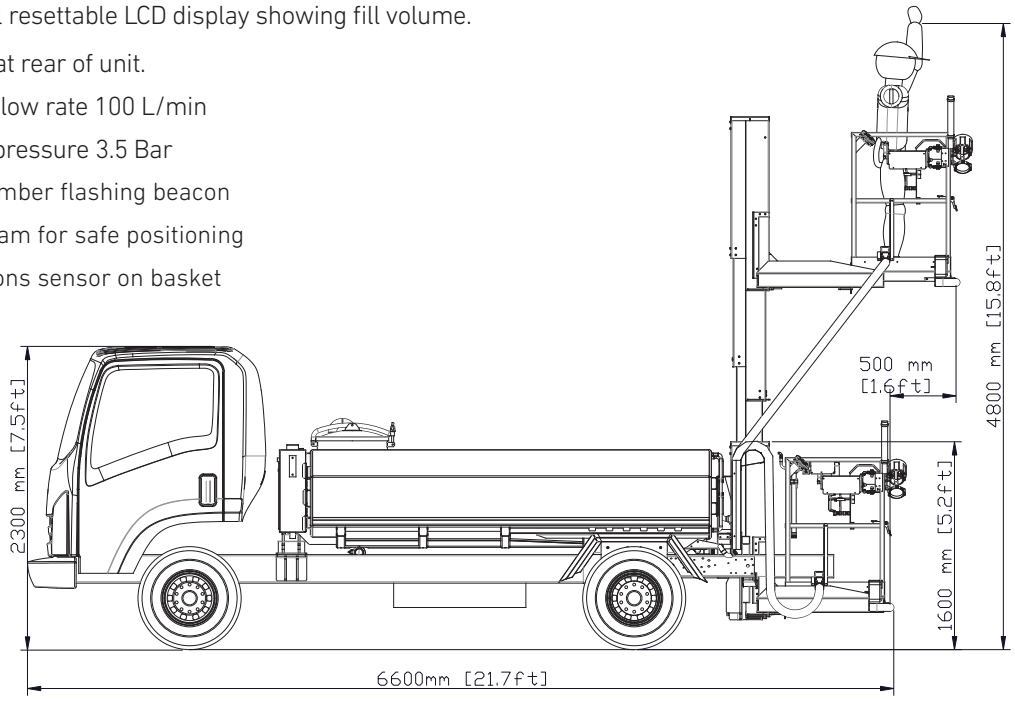

COMPANY VESTERGAARD

For questions and requests for further information please contact:

Vestergaard Company A/S
Skullebjerg 31 • Gevninge
DK-4000 Roskilde • Denmark
Tel: +45 4642 2222
sales@vestergaardcompany.com
www.vestergaardcompany.com

Vestergaard Company Inc.
1903 W. Rte. 120
McHenry, IL 60051 • USA
Tel: +1 815 759-9102
Toll free: +1 888 759-9118
usa@vestergaardcompany.com

Vestergaard Company SASU
Bâtiment 3450 A, 4, Rue du Té
93290 Tremblay-en-France •
France
Tel.: +33 1 30 34 55 87
france@vestergaardcompany.com

Vestergaard Company Ltd.
21/46 Moo 10,
Nongkham, Sriracha,
Chonburi 20230 • Thailand
Tel: +66 33 265769
asia@vestergaardcompany.com

Caution: Specifications are advisory only, and will vary. Please request exact data.