

ELEPHANT[®] MINI MY LITE



TECHNICAL SPECIFICATIONS

➤ Chassis:

- Volvo FL250, 4 x 2 (Vestergaard spec.) EURO 6 engine
- Automatic gearbox 6-Speed Alison306

➤ Colour scheme:

- Chassis cabin and tank section: White colour (RAL 9016 equal to Volvo 1107)
- Boom system: Light Grey (RAL 7040)

➤ Tank:

- 3000 liter pre-mix type I, 1000 liter type II/IV
- Stainless steel tanks with 5 year warranty
- Tank 2 is thermal insulated from tank 1
- Pipes for bottom filling. As standard capped with 2" threads

➤ Heating System

- 160 kW diesel total heating capacity. Two separate heaters in parallel setup
- Batch heating system, as ensure a quick start-up time.
- Automatic fire extinguish system. Novec 1230

➤ Fluid systems


- One circulation pump Type-I compatible max. flow rate 210±10 l/min.
- One pump diaphragm Type-I/II/IV compatible max. flow rate 120±10 l/min
- Separate tubing of Type I and Type II/V fluid to basket. To reduce spillage by change in sprayed fluid type
- Onboard filling function for both tanks

➤ Performance - lift system:

- Fully proportional operation of boom system.
- Open basket design
- Working LED-light at basket
- Max. rated load in basket: 205 kg
- Boom construction sandblasted and quality coated corrosion class C4-high

➤ Information display in truck cabin

- Tank level indication
- Temperature in tank 1 and batch tank

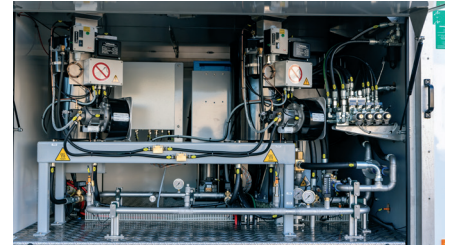

For questions and requests for further information please contact:

Vestergaard Company A/S

Skullejerg 31 • Gevninge
DK-4000 Roskilde • Denmark
Tel: +45 4642 2222
sales@vestergaardcompany.com
www.vestergaardcompany.com

Vestergaard Company Inc.

9103 W. Rte. 120
McHenry, IL 60051 • USA
Tel: +1 815 759-9102
Toll free: +1 888 759-9118
usa@vestergaardcompany.com

Vestergaard Company SASU

Bâtiment 3450 A, 4, Rue du Té
93290 Tremblay-en-France • France
Tel.: +33 1 30 34 55 87
france@vestergaardcompany.com

Vestergaard Company Ltd.

Pinthong Industrial Estate
789/50 Moo 1, Nongkham
Chonburi 20230 • Thailand
Tel: +66 (0) 38 348 630
asia@vestergaardcompany.com

Caution: Specifications are advisory only, and will vary. Please request exact data.



OPTIONS

► Options:

- Ground gun in left side behind truck cabin. Max hose length 15 meter Only able to spray tank 1 fluid
- Access into tanks via manhole covers and steps/ladder left side
- Spare wheel front/rear
- Basket Side Cover To protect the operator in the basket from the weather
- Amber flashing beacon Located at hydraulic tank
- Side guard on chassis – left or/and right side In order to prevent underride collisions
- Coupling for bottom filling Stortz, Camlok, Guillemín, Todo, Elaflex
- Hot at nozzle for pre-mix system To insure instant heated fluid at spray gun in basket
- Additional spray gun in basket
- Reverse camera
- Level display at side of tank section
- Flow sensor for sprayed fluid
- Basket sensor for safety

